



PRODUCT CATALOGUE

产品目录 2022



CONTENTS

目录

Transceiver Product /

400G QSFP-DD	01
200G QSFP56/QSFP-DD	02
100G QSFP28	03
100G CFPx	05
50G QSFP28	06
40G QSFP+	07
25G SFP28	08
10G XFP	09
10G SFP+	11
COMPACT SFP	14
2.5G SFP	15
1.25G SFP	17
155M SFP	19
PON	21
COPPER SFP	23





Cable Product

ACTIVE OPTICAL CABLE	25
DIRECT ATTACH CABLE	26

Appendix

50GHZ DWDM WAVELENGTH	27
100GHZ DWDM WAVELENGTH	28
CWDM BAIL COLOR REMARKS	28

公司介绍


COMPANY PROFILE

光为光通信是通宇通讯(002792.SZ)的全资子公司,致力于打造光模块行业一流品牌,成为国内外主流光模块供应商。自成立以来,光为光通信以先进的工艺技术和优质的产品服务赢得了全球客户的青睐,模块年销量高达八百万只以上,产品广泛应用于城域网、局域网、存储网络、无线网络、数据中心以及云计算等领域。

通宇通讯拟定投入5.2亿元全方位打造一个全新的光为,全面提升光为的实力,用于高速光模块、高速光器件的研发,光为将在产品、技术上实现重大突破,增强企业核心竞争力。

SHENZHEN OPWAY COMMUNICATION CO., LTD IS WHOLLY-OWNED SUBSIDIARY OF TONGYU COMMUNICATION INC.(STOCK CODE:002792). OPWAY HAS BEEN DEDICATED TO THE OPTICAL TRANSCEIVER DESIGN AND MANUFACTURE SINCE 2010.NOW IT IS ONE OF THE MAINSTREAM OPTICAL TRANSCEIVER SUPPLIERS WITH 5 MILLION UNITS OF ANNUAL SHIPMENT. WITH THE HIGH ATTENTION OF THE OPTICAL COMMUNICATION INDUSTRY AND YEARS OF RICH EXPERIENCE,OPWAY CAN PROVIDE FULL RANGE OF OPTICAL TRANSCEIVER PRODUCTS AND SOLUTIONS,THE PRODUCTS ARE WIDELY USED IN THE MAN, LAN, FIBER CHANNEL NETWORK,WIRELESS NETWORKS, DATA CENTER, CLOUD COMPUTING AND OTHER FIELDS.

TONGYU COMMUNICATION PLANS TO INVEST ¥520 MILLION TO BUILD A NEW OPWAY IN AN ALL-ROUND WAY, AND COMPREHENSIVELY IMPROVE OPWAY'S STRENGTH.THIS FUND WILL BE MAINLY USED FOR RESEARCH AND DEVELOPMENT OF HIGH SPEED OPTICAL MODULE AND HIGH SPEED OPTICAL COMPONENT . OPWAY WILL ACHIEVE A MAJOR BREAKTHROUGH IN PRODUCTS AND TECHNOLOGY, ENHANCE THE CORE COMPETITIVENESS.

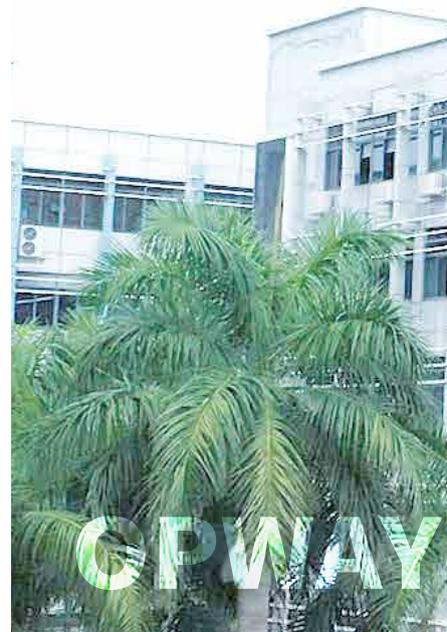

企业精神

企业精神:务实创新 努力拼搏 永不言败

我们的团队:团结协作 狼性毕现 召之即来 来之能战
战之能胜

我们的状态:阳光 快乐 激情 充满正能量

我们的作风:谦虚 勤奋 专业 感恩 责任

ENTERPRISE SPIRIT

ENTREPRENEURIAL SPIRIT: PRAGMATIC INNOVA-
TION, HARD WORK, NEVER GIVE UP

OUR TEAM: UNITY AND COOPERATION, FULL OF
WOLF SPIRIT, COME UPON CALL, COME TO FIGHT,

FIGHT TO WIN

OUR STATE: SUNSHINE, JOY, PASSION, FULL OF
POSITIVE ENERGY

OUR STYLE: HUMBLE, DILIGENT, PROFESSIONAL,
GRATEFUL, AND RESPONSIBLE



Sep

2014

荣获国家高新技术企业证书

Awarded

“National High-tech Enterprise”



02

Jan

2022

荣膺广东省“专精特新企业”称号

Awarded

"distinctive, specialized,
sophisticated and new enterprise"
in Guangdong Province



01

Dec


2018

荣获面向“5G和大型数据中心高速
光模块工程技术研究中心”称号

Awarded

“High-speed Optical Transceiver
Engineering Research Center for 5G and IDC”

03

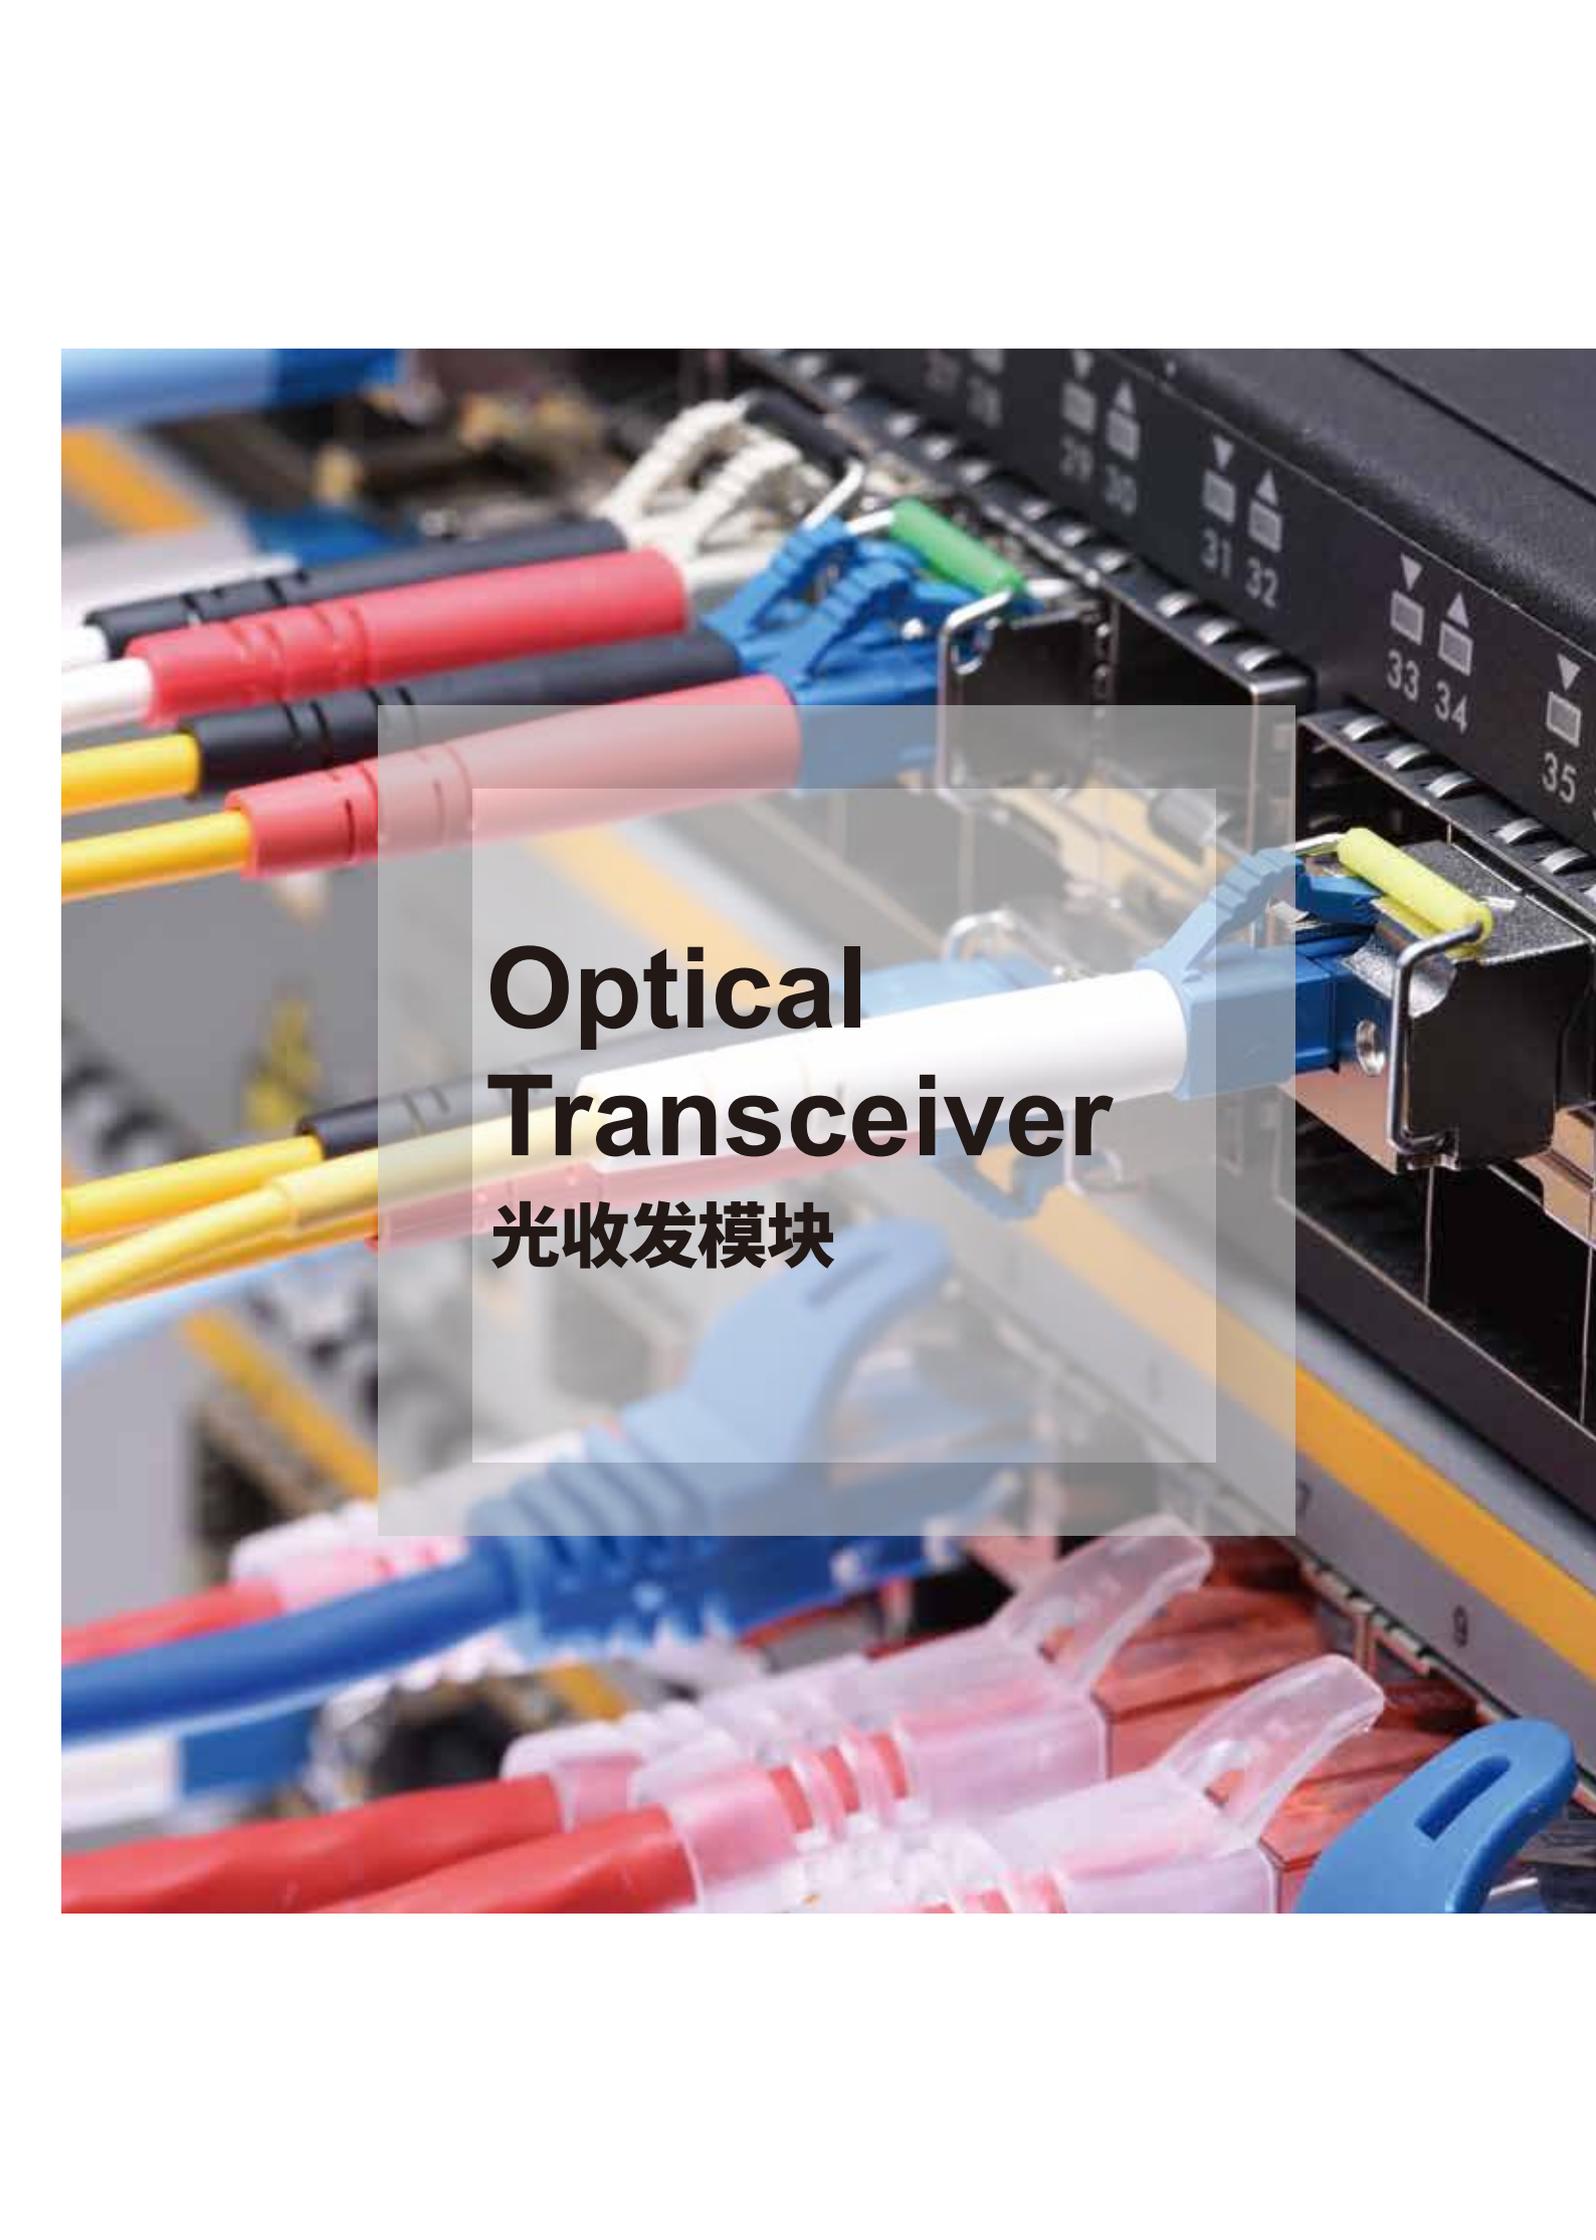

Optical Transceiver 光收发模块

400G QSFP-DD SOLUTIONS

应用 Application

400G以太网/数据中心/云网络

400GBASE Ethernet/Data center/cloud network



400G QSFP-DD

Features

- 热插拔QSFP-DD封装
 - 符合QSFP-DD MSA标准
 - 符合IEEE 802.3bs标准
 - 最高速率可达425Gb/s
 - 最远传输距离可达40Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
-
- Hot-pluggable QSFP-DD package
 - Compliant with QSFP-DD MSA
 - Compliant to IEEE 802.3bs
 - Supports 425Gb/s data rate
 - Maximum link up to 40km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPDJ01-8	400Gb/s	QSFP-DD	100M	850nm	MPO-16/24	VCSEL	PIN	MM
OPDJ05-4	400Gb/s	QSFP-DD	500M	1310nm	MPO-12	EML	PIN	SM
OPDJ02	400Gb/s	QSFP-DD	2KM	CWDM	Dual LC	EML	PIN	SM
OPDJ10	400Gb/s	QSFP-DD	10KM	LWDM	Dual LC	EML	PIN	SM
OPDJ40	400Gb/s	QSFP-DD	40KM	LWDM	Dual LC	EML	APD	SM



应用 Application

200G以太网/数据中心/云网络
 5G中传和回传
 200GBASE Ethernet/Data center/cloud network
 5G midhaul and backhaul

200G QSFP56/QSFP-DD SOLUTIONS

Features

- 热插拔QSFP56或QSFP-DD封装
 - 符合QSFP56 MSA或QSFP-DD MSA
 - 最高速率可达212.5Gb/s
 - 最远传输距离可达40Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
- Hot-pluggable QSFP56 or QSFP-DD package
 - Compliant with QSFP56 or QSFP-DD MSA
 - Supports 212.5Gb/s data rate
 - Maximum link up to 40km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant



200G QSFP56

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPQH01	200Gb/s	QSFP56	100M	850nm	MPO-12	VCSEL	PIN	MM
OPQH02	200Gb/s	QSFP56	2KM	CWDM	Dual LC	DML	PIN	SM
OPDH10	200Gb/s	QSFP-DD	10KM	LWDM	Dual LC	EML	PIN	SM
OPDH40	200Gb/s	QSFP-DD	40KM	LWDM	Dual LC	EML	APD	SM

100G QSFP28 SOLUTIONS

应用 Application

100G数据中心内部网络/数据中心互联/城域网等等
 100G Data center internal network/
 Data center interconnection/MAN



100G QSFP28

Features

- 热插拔QSFP28封装
 - 符合QSFP28 MSA
 - 四通道设计, 单通道25.78Gb/s或27.95Gb/s
 - 最远传输距离可达80Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
- Hot-pluggable QSFP28 package
 - Compliant with QSFP28 MSA
 - Four channels design, supports 25.78Gb/s data rate or 27.95Gb/s data rate single channel
 - Maximum link up to 80km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPQE01	103Gb/s	QSFP28	100M	850nm	MPO-12	VCSEL	PIN	MM
OPQE02	103Gb/s	QSFP28	2KM	CWDM	Dual LC	DFB	PIN	SM
OPQE02-M	103Gb/s	QSFP28	2KM/150M	CWDM	Dual LC	DFB	PIN	SM/MM
OPQE02-4	103Gb/s	QSFP28	2KM	1310nm	MPO-12	DFB	PIN	SM
OPQE10	103/112Gb/s	QSFP28	10KM	LWDM	Dual LC	DML	PIN	SM
OPQE10-S	103Gb/s	QSFP28	10KM	LWDM	Dual LC	DML	PIN	SM
OPQE10-RX	103Gb/s	QSFP28	10KM	/	Single LC	/	PIN	SM
OPQE30	103/112Gb/s	QSFP28	30KM	LWDM	Dual LC	DML	PIN	SM
OPQE40	103/112Gb/s	QSFP28	30KM/40KM (FEC)	LWDM	Dual LC	DML	APD	SM
OPQE40-E	103/112Gb/s	QSFP28	40KM	LWDM	Dual LC	EML	APD	SM
OPQE40-RX	103/112Gb/s	QSFP28	40KM	/	Single LC	/	APD	SM
OPQE80	103Gb/s	QSFP28	80KM (FEC)	LWDM	Dual LC	EML	SOA+PIN	SM



应用 Application

100G以太网
电信传输网
100GBASE Ethernet
Telecommunication transmission network

100G QSFP28 SOLUTIONS

Features

- 热插拔QSFP28封装
 - 符合100G Lambda MSA
 - 单通道设计, 单通道速率106.25Gb/s
 - 最长传输距离可达40Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
-
- Hot-pluggable QSFP28
 - Compliant with 100G Lambda MSA
 - Single channel design, supports 106.25Gb/s data rate
 - Maximum link up to 40km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant



100G QSFP28 Single Lambda

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPQE05-SW	106.25Gb/s	QSFP28	500M	1310nm	Dual LC	EML	PIN	SM
OPQE02-SW	106.25Gb/s	QSFP28	2KM	1310nm	Dual LC	EML	PIN	SM
OPQE10-SW	106.25Gb/s	QSFP28	10KM	1310nm	Dual LC	EML	PIN	SM
OPQE40-SW	106.25Gb/s	QSFP28	40KM	1309nm	Dual LC	EML	APD	SM
OPHE10-2733	106.25Gb/s	QSFP28	10KM	1270/1330nm	Single LC	EML	PIN	SM
OPHE10-3327	106.25Gb/s	QSFP28	10KM	1330/1270nm	Single LC	EML	PIN	SM
OPHE40-0409	106.25Gb/s	QSFP28	40KM	1304/1309nm	Single LC	EML	APD	SM
OPHE40-0904	106.25Gb/s	QSFP28	40KM	1309/1304nm	Single LC	EML	APD	SM

100G CFPx SOLUTIONS

应用 Application

100G以太网/OTU4

100GBASE Ethernet/OTU4



100G CFPx

Features

- 热插拔CFP/CFP2/CFP4封装
 - 符合CFP/CFP2/CFP4 MSA
 - 四通道设计, 单通道25.78Gb/s或27.95Gb/s
 - 最远传输距离可达80Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
- Hot-pluggable CFP/CFP2/CFP4 package
 - Compliant with CFP/CFP2/CFP4 MSA
 - Four channels design, supports 25.78Gb/s data rate or 27.95Gb/s data rate single channel
 - Maximum link up to 80km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPC4E10	112Gb/s	CFP4	10KM	LWDM	Dual LC	EML	PIN	SM
OPC2E10	112Gb/s	CFP2	10KM	LWDM	Dual LC	DML	PIN	SM
OPC2E10-RX	112Gb/s	CFP2	10KM	/	Single LC	/	PIN	SM
OPC2E40	112Gb/s	CFP2	40KM	LWDM	Dual LC	EML	SOA+PIN	SM
OPC2E80	103Gb/s	CFP2	80KM	LWDM	Dual LC	EML	SOA+PIN	SM
OPCFE10	112Gb/s	CFP	10KM	LWDM	Dual LC	EML	PIN	SM
OPCFE40	112Gb/s	CFP	40KM	LWDM	Dual LC	EML	SOA+PIN	SM



应用 Application

50G QSFP28 SOLUTIONS

5G中传和回传

5G midhaul and backhaul

Features

- 热插拔QSFP28封装
 - 符合QSFP28 MSA
 - 单通道设计, 单通道速率53.125Gb/s
 - 最远传输距离可达40Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
-
- Hot-pluggable QSFP28 package
 - Compliant with QSFP28 MSA
 - Single channel design, supports 53.125Gb/s data rate
 - Maximum link up to 40km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant



50G QSFP28

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPQG10	50Gb/s	QSFP28	10KM	1310nm	Dual LC	DML	PIN	SM
OPQG40	50Gb/s	QSFP28	40KM	1310nm	Dual LC	EML	APD	SM
OPHG10-2733	50Gb/s	QSFP28	10KM	TX1270/RX1330	Single LC	DML	PIN	SM
OPHG10-3327	50Gb/s	QSFP28	10KM	TX1270/RX1330	Single LC	DML	PIN	SM
OPHG40-2930	50Gb/s	QSFP28	40KM	TX1295/RX1309	Single LC	EML	APD	SM
OPHG40-3029	50Gb/s	QSFP28	40KM	TX1309/RX1295	Single LC	EML	APD	SM

40G QSFP+ SOLUTIONS

应用 Application

数据中心/园区网络/城域网络

Data center/campus network/MAN



40G QSFP+

Features

- 热插拔QSFP+封装
 - 符合QSFP+ MSA
 - 四通道设计, 单通道最高速率11.2Gb/s
 - 最远传输距离可达40Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C
 - 内置数字诊断功能
 - 符合RoHS标准
- Hot-pluggable QSFP+ package
 - Compliant with QSFP+ MSA
 - Four channels design, supports 11.2Gb/s data rate single channel
 - Maximum link up to 40km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPQC01	40Gb/s	QSFP+	100M	850nm	MPO-12	VCSEL	PIN	MM
OPQC03	40Gb/s	QSFP+	300M	850nm	MPO-12	VCSEL	PIN	MM
OPQC02	40Gb/s	QSFP+	2KM	CWDM	Dual LC	DFB	PIN	SM
OPQC02-4	40Gb/s	QSFP+	2KM	1310nm	MPO-12	DFB	PIN	SM
OPQC02-M	40Gb/s	QSFP+	2KM/100M	CWDM	Dual LC	DFB	PIN	SM/MM
OPQC10	40Gb/s	QSFP+	10KM	CWDM	Dual LC	DFB	PIN	SM
OPQC10-4	40Gb/s	QSFP+	10KM	1310nm	MPO-12	DFB	PIN	SM
OPQC40	40Gb/s	QSFP+	40KM	CWDM	Dual LC	DFB	APD	SM



应用 Application

25G SFP28 SOLUTIONS

数据中心/25G以太网, 5G前传/光纤通道

Data center/25GBASE Ethernet, 5G fronthaul/ Fiber channel

Features

- 热插拔SFP28封装
 - 符合SFP28 MSA
 - 最高速率25.78Gb/s
 - 最远传输距离可达40Km
 - +3.3V单电源供电
 - 工作温度:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合RoHS标准
-
- Hot-pluggable SFP28 package
 - Compliant with SFP28 MSA
 - Supports 25.78Gb/s data rate
 - Maximum link up to 40km
 - Single +3.3V power supply
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant



25G SFP28

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP3001D	25Gb/s	SFP28	100M	850nm	Dual LC	VCSEL	PIN	MM
OP3003D	25Gb/s	SFP28	300M	1310nm	Dual LC	DFB	PIN	SM
OP3010D	25Gb/s	SFP28	10KM	1310nm	Dual LC	DFB	PIN	SM
OP3040D	25Gb/s	SFP28	30KM/40KM (FEC)	1310nm	Dual LC	DFB	APD	SM
OP3040D-E	25Gb/s	SFP28	40KM	1310nm	Dual LC	EML	APD	SM
OP5010D-2733	25Gb/s	SFP28	10KM	TX1270/RX1330	Single LC	DFB	PIN	SM
OP5010D-3327	25Gb/s	SFP28	10KM	TX1330/RX1270	Single LC	DFB	PIN	SM
OP5040D-2731	25Gb/s	SFP28	40KM	TX1270/RX1310	Single LC	DFB	APD	SM
OP5040D-3127	25Gb/s	SFP28	40KM	TX1310/RX1270	Single LC	DFB	APD	SM
OP3010D-XX	25Gb/s	SFP28	10KM	1270~1370nm	Dual LC	DFB	PIN	SM
OP3010D-XX	25Gb/s	SFP28	10KM	1470~1570nm	Dual LC	EML	PIN	SM
OP3010D-DXX	25Gb/s	SFP28	10KM	DWDM ITU	Dual LC	EML	PIN	SM
OP3010D-TUN48	25Gb/s	SFP28	10KM	Tunable DWDM (48λ)	Dual LC	EML	PIN	SM
OP3010D-LXXX	25Gb/s	SFP28	10KM	LWDM	Dual LC	DFB	PIN	SM
OP3040D-LXXX	25Gb/s	SFP28	40KM	LWDM	Dual LC	EML	APD	SM
OP3010D-MXXX	25Gb/s	SFP28	10KM	MWDM	Dual LC	DFB	PIN	SM

10G XFP SOLUTIONS

应用 Application

SONET OC-192/SDH STM-64
10GBASE Ethernet



10G XFP

Features

- 热插拔XFP封装
 - 符合XFP MSA
 - 支持多速率协议 (9.9Gb/s ~ 11.3Gb/s)
 - 最远传输距离可达80Km
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
- Hot-pluggable XFP package
 - Compliant with XFP MSA
 - Support multi protocol from 9.9Gb/s ~ 11.3Gb/s
 - Maximum link up to 80km
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP8903	10Gb/s	XFP	300M	850nm	Dual LC	VCSEL	PIN	MM
OP8902	10Gb/s	XFP	220M	1310nm	Dual LC	FP	PIN	MM
OP8904	10Gb/s	XFP	2KM	1310nm	Dual LC	FP	PIN	SM
OP8910	10Gb/s	XFP	10KM	1310nm	Dual LC	DFB	PIN	SM
OP8940-13	10Gb/s	XFP	40KM	1310nm	Dual LC	DFB	PIN	SM
OP8940	10Gb/s	XFP	40KM	1550nm	Dual LC	EML	PIN	SM
OP8980	10Gb/s	XFP	80KM	1550nm	Dual LC	EML	APD	SM

10G Bi-Di XFP

OPP910-2733	10Gb/s	XFP	10KM	TX1270/RX1330	Single LC	DFB	PIN	SM
OPP910-3327	10Gb/s	XFP	10KM	TX1330/RX1270	Single LC	DFB	PIN	SM
OPP940-2733	10Gb/s	XFP	40KM	TX1270/RX1330	Single LC	DFB	PIN	SM
OPP940-3327	10Gb/s	XFP	40KM	TX1330/RX1270	Single LC	DFB	PIN	SM
OPP960-2733	10Gb/s	XFP	60KM	TX1270/RX1330	Single LC	DFB	APD	SM
OPP960-3327	10Gb/s	XFP	60KM	TX1330/RX1270	Single LC	DFB	APD	SM
OPP980-45	10Gb/s	XFP	80KM	TX1490/RX1550	Single LC	EML	APD	SM
OPP980-54	10Gb/s	XFP	80KM	TX1550/RX1490	Single LC	EML	APD	SM



应用 Application

SONET OC-192/SDH STM-64
10GBASE Ethernet

10G XFP SOLUTIONS

Features

- 热插拔XFP封装
- 符合XFP MSA
- 支持多速率协议 (9.9Gb/s ~ 11.3Gb/s)
- 1270~1610nm CWDM, ITU DWDM波长可选
- 最远传输距离可达80Km
- 双LC光接口
- 工作温度范围:0~+70°C、-40~+85°C
- 内置数字诊断功能
- 符合 RoHS 标准



10G CWDM&DWDM XFP


- Hot-pluggable XFP package
- Compliant with XFP MSA
- Support multi protocol from 9.9Gb/s ~ 11.3Gb/s
- 1270~1610nm CWDM, ITU DWDM select
- Maximum link up to 80km
- Dual LC connector
- Operating temperature range:0~70°C or -40~+85°C optional
- Built-in digital diagnostic functions
- RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP8910-XX	10Gb/s	XFP	10KM	1270~1610nm	Dual LC	DFB	PIN	SM
OP8940-XX	10Gb/s	XFP	40KM	1270~1450nm	Dual LC	DFB	PIN	SM
OP8940-XX	10Gb/s	XFP	40KM	1470~1610nm	Dual LC	EML	PIN	SM
OP8960-XX	10Gb/s	XFP	60KM	1270~1450nm	Dual LC	DFB	APD	SM
OP8980-XX	10Gb/s	XFP	80KM	1470~1610nm	Dual LC	EML	APD	SM
OP8940-DXX	10Gb/s	XFP	40KM	DWDM ITU	Dual LC	EML	PIN	SM
OP8980-DXX	10Gb/s	XFP	80KM	DWDM ITU	Dual LC	EML	APD	SM

10G SFP+ SOLUTIONS

应用 Application

SONET OC-192/SDH STM-64
10GBASE Ethernet

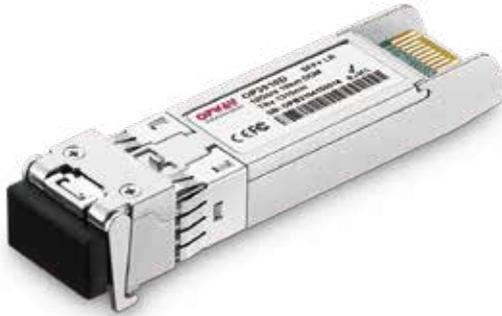

10G SFP+

Features

- 热插拔SFP+封装
 - 符合SFP+ MSA
 - +3.3V单电源供电
 - 支持多速率协议 (Up to 11.3Gb/s)
 - 最长传输距离可达100Km
 - 双LC光接口
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
-
- Hot-pluggable SFP+ package
 - Compliant with SFP+ MSA
 - Single +3.3V power supply
 - Support multi protocol up to 11.3Gb/s
 - Maximum link up to 100km
 - Dual LC connector
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP3902D	10Gb/s	SFP+	220M	1310nm	Dual LC	FP	PIN	MM
OP3903D	10Gb/s	SFP+	300M	850nm	Dual LC	VCSEL	PIN	MM
OP3904D	10Gb/s	SFP+	2KM	1310nm	Dual LC	FP	PIN	SM
OP3910D	10Gb/s	SFP+	10KM	1310nm	Dual LC	DFB	PIN	SM
OP3940D-13	10Gb/s	SFP+	40KM	1310nm	Dual LC	DFB	PIN	SM
OP3940D	10Gb/s	SFP+	40KM	1550nm	Dual LC	EML	PIN	SM
OP3980D	10Gb/s	SFP+	80KM	1550nm	Dual LC	EML	APD	SM
OP390AD	10Gb/s	SFP+	100KM	1550nm	Dual LC	EML	APD	SM

10G SFP+ with CDR

OP3910S	10Gb/s	SFP+	10KM	1310nm	Dual LC	DFB	PIN	SM
OP3940S	10Gb/s	SFP+	40KM	1550nm	Dual LC	EML	PIN	SM
OP3980S	10Gb/s	SFP+	80KM	1550nm	Dual LC	EML	APD	SM
OP390AS	10Gb/s	SFP+	100KM	1550nm	Dual LC	EML	APD	SM



应用 Application

10G SFP+ SOLUTIONS

SONET OC-192/SDH STM-64
10GBASE Ethernet

Features

- 热插拔SFP+封装
- 符合SFP+ MSA
- +3.3V单电源供电
- 支持多速率协议 (Up to 11.3Gb/s)
- 1270~1610nm CWDM, ITU DWDM波长可选
- 最远传输距离可达100Km
- 双LC光接口
- 工作温度范围:0~+70°C、-40~+85°C
- 内置数字诊断功能
- 符合 RoHS 标准



10G CWDM&DWDM SFP+

- Hot-pluggable SFP+ package
- Compliant with SFP+ MSA
- Single +3.3V power supply
- Support multi protocol up to 11.3Gb/s
- 1270~1610nm CWDM, ITU DWDM select
- Maximum link up to 100km
- Dual LC connector
- Operating temperature range:0~70°C or -40~+85°C optional
- Built-in digital diagnostic functions
- RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP3910D-XX	10Gb/s	SFP+	10KM	1270~1610nm	Dual LC	DFB	PIN	SM
OP3920D-XX	10Gb/s	SFP+	20KM	1270~1450nm	Dual LC	DFB	PIN	SM
OP3940D-XX	10Gb/s	SFP+	40KM	1270~1450nm	Dual LC	DFB	PIN	SM
OP3940D-XX	10Gb/s	SFP+	40KM	1470~1610nm	Dual LC	EML	PIN	SM
OP3960D-XX	10Gb/s	SFP+	60KM	1270~1450nm	Dual LC	DFB	APD	SM
OP3980D-XX	10Gb/s	SFP+	80KM	1470~1610nm	Dual LC	EML	APD	SM
OP3940D-DXX	10Gb/s	SFP+	40KM	DWDM ITU	Dual LC	EML	PIN	SM
OP3980D-DXX	10Gb/s	SFP+	80KM	DWDM ITU	Dual LC	EML	APD	SM
OP390AD-DXX	10Gb/s	SFP+	100KM	DWDM ITU	Dual LC	EML	APD	SM

10G SFP+ SOLUTIONS

应用 Application

SONET OC-192/SDH STM-64

10GBASE Ethernet



10G Bi-Di SFP+

Features

- 热插拔SFP+封装
 - 符合SFP+ MSA
 - +3.3V单电源供电
 - 支持多速率协议 (Up to 11.3Gb/s)
 - 最远传输距离可达80Km
 - 单LC光接口
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
-
- Hot-pluggable SFP+ package
 - Compliant with SFP+ MSA
 - Single +3.3V power supply
 - Support multi protocol up to 11.3Gb/s
 - Maximum link up to 80km
 - Single LC connector
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP5910D-2733	10Gb/s	SFP+	10KM	TX1270/RX1330	Single LC	DFB	PIN	SM
OP5910D-3327	10Gb/s	SFP+	10KM	TX1330/RX1270	Single LC	DFB	PIN	SM
OP5920D-2733	10Gb/s	SFP+	20KM	TX1270/RX1330	Single LC	DFB	PIN	SM
OP5920D-3327	10Gb/s	SFP+	20KM	TX1330/RX1270	Single LC	DFB	PIN	SM
OP5940D-2733	10Gb/s	SFP+	40KM	TX1270/RX1330	Single LC	DFB	PIN	SM
OP5940D-3327	10Gb/s	SFP+	40KM	TX1330/RX1270	Single LC	DFB	PIN	SM
OP5960D-2733	10Gb/s	SFP+	60KM	TX1270/RX1330	Single LC	DFB	APD	SM
OP5960D-3327	10Gb/s	SFP+	60KM	TX1330/RX1270	Single LC	DFB	APD	SM
OP5980D-2733	10Gb/s	SFP+	70KM	TX1270/RX1330	Single LC	DFB	APD	SM
OP5980D-3327	10Gb/s	SFP+	70KM	TX1330/RX1270	Single LC	DFB	APD	SM
OP5980D-45	10Gb/s	SFP+	80KM	TX1490/RX1550	Single LC	EML	APD	SM
OP5980D-54	10Gb/s	SFP+	80KM	TX1550/RX1490	Single LC	EML	APD	SM



应用 Application

点对点光纤到户应用

光纤通道

Point to point FTTH application

Fiber channel

COMPACT SFP SOLUTIONS

Features

- 与普通SFP一样的结构下具有两个通道,每个通道均可独立实现单纤双向传输
 - 符合SFF-8472标准
 - 符合CSFP MSA Option2标准
 - +3.3V单电源供电
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
- Same compact package with SFP, with Dual LC two channels
Each channel can achieve Bi-Di transmission
 - Compliant with SFF-8472
 - Compliant with CSFP MSA Option2
 - Single +3.3V power supply
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant




Compact SFP

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPS220D-35	155Mb/s	CSFP	20KM	TX1310/RX1550	Dual LC	FP	PIN	SM
OPS220D-53	155Mb/s	CSFP	20KM	TX1550/RX1310	Dual LC	FP	PIN	SM
OPS420D-35	1.25Gb/s	CSFP	20KM	TX1310/RX1550	Dual LC	FP	PIN	SM
OPS420D-53	1.25Gb/s	CSFP	20KM	TX1550/RX1310	Dual LC	DFB	PIN	SM
OPS420D-34	1.25Gb/s	CSFP	20KM	TX1310/RX1490	Dual LC	FP	PIN	SM
OPS420D-43	1.25Gb/s	CSFP	20KM	TX1490/RX1310	Dual LC	DFB	PIN	SM
OPS620D-35	2.5Gb/s	CSFP	20KM	TX1310/RX1550	Dual LC	DFB	PIN	SM
OPS620D-53	2.5Gb/s	CSFP	20KM	TX1550/RX1310	Dual LC	DFB	PIN	SM

2.5G SFP SOLUTIONS

应用 Application

城域网/接入网
SONET OC-48/SDH STM-16/2xFC
MAN/AN

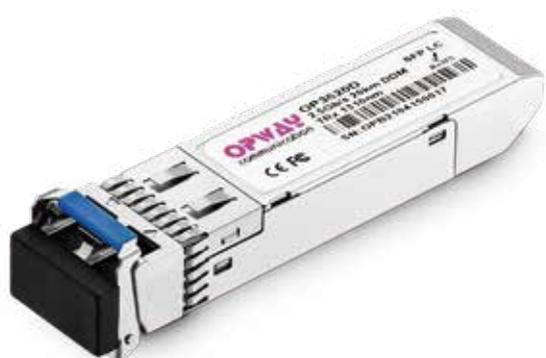

2.5G SFP

Features

- 热插拔SFP封装
 - 符合SFP MSA
 - +3.3V单电源供电
 - 最远传输距离可达120Km
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
-
- Hot-pluggable SFP package
 - Compliant with SFP MSA
 - Single +3.3V power supply
 - Maximum link up to 120km
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant





2.5G SFP SOLUTIONS

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP3603D	2.5Gb/s	SFP	300M	850nm	Dual LC	VCSEL	PIN	MM
OP3602D	2.5Gb/s	SFP	2KM	1310nm	Dual LC	FP	PIN	SM
OP3620D	2.5Gb/s	SFP	20KM	1310nm	Dual LC	DFB	PIN	SM
OP3640D	2.5Gb/s	SFP	40KM	1550nm	Dual LC	DFB	PIN	SM
OP3680D	2.5Gb/s	SFP	80KM	1550nm	Dual LC	DFB	APD	SM
OP360CD	2.5Gb/s	SFP	120KM	1550nm	Dual LC	DFB	APD	SM

2.5G Bi-Di LC SFP

OP5602D-35	2.5Gb/s	SFP	2KM	TX1310/RX1550	Single LC	FP	PIN	SM
OP5602D-53	2.5Gb/s	SFP	2KM	TX1550/RX1310	Single LC	DFB	PIN	SM
OP5620D-35	2.5Gb/s	SFP	20KM	TX1310/RX1550	Single LC	DFB	PIN	SM
OP5620D-53	2.5Gb/s	SFP	20KM	TX1550/RX1310	Single LC	DFB	PIN	SM
OP5640D-45	2.5Gb/s	SFP	40KM	TX1490/RX1550	Single LC	DFB	PIN	SM
OP5640D-54	2.5Gb/s	SFP	40KM	TX1550/RX1490	Single LC	DFB	PIN	SM
OP5680D-45	2.5Gb/s	SFP	80KM	TX1490/RX1550	Single LC	DFB	APD	SM
OP5680D-54	2.5Gb/s	SFP	80KM	TX1550/RX1490	Single LC	DFB	APD	SM
OP560CD-45	2.5Gb/s	SFP	120KM	TX1490/RX1550	Single LC	DFB	APD	SM
OP560CD-54	2.5Gb/s	SFP	120KM	TX1550/RX1490	Single LC	DFB	APD	SM

2.5G CWDM&DWDM SFP

OP3640D-XX	2.5Gb/s	SFP	40KM	1270~1610nm	Dual LC	DFB	PIN	SM
OP3680D-XX	2.5Gb/s	SFP	80KM	1270~1610nm	Dual LC	DFB	APD	SM
OP360CD-XX	2.5Gb/s	SFP	120KM	1270~1610nm	Dual LC	DFB	APD	SM
OP3640D-DXX	2.5Gb/s	SFP	40KM	DWDM ITU	Dual LC	DFB	PIN	SM
OP3680D-DXX	2.5Gb/s	SFP	80KM	DWDM ITU	Dual LC	DFB	APD	SM
OP360CD-DXX	2.5Gb/s	SFP	120KM	DWDM ITU	Dual LC	DFB	APD	SM

1.25G SFP SOLUTIONS

应用 Application

千兆以太网, 城域网/接入网
1000Base Ethernet, MAN/AN

Features

- 热插拔SFP封装
- 符合SFP MSA
- +3.3V单电源供电
- 最远传输距离可达120Km
- 双LC光接口
- 工作温度范围:0~+70°C、-40~+85°C
- 内置数字诊断功能
- 符合 RoHS 标准



1.25G SFP

- Hot-pluggable SFP package
- Compliant with SFP MSA
- Single +3.3V power supply
- Maximum link up to 120km
- Dual LC connector
- Operating temperature range:0~70°C or -40~+85°C optional
- Built-in digital diagnostic functions
- RoHS compliant

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP3405D	1.25Gb/s	SFP	500M	850nm	Dual LC	VCSEL	PIN	MM
OP3402D	1.25Gb/s	SFP	2KM	1310nm	Dual LC	FP	PIN	MM
OP3420D	1.25Gb/s	SFP	20KM	1310nm	Dual LC	FP	PIN	SM
OP3440D	1.25Gb/s	SFP	40KM	1310nm	Dual LC	DFB	PIN	SM
OP3440D-15	1.25Gb/s	SFP	40KM	1550nm	Dual LC	DFB	PIN	SM
OP3480D	1.25Gb/s	SFP	80KM	1550nm	Dual LC	DFB	PIN	SM
OP340CD	1.25Gb/s	SFP	120KM	1550nm	Dual LC	DFB	APD	SM

1.25G CWDM&DWDM SFP


OP3440D-XX	1.25Gb/s	SFP	40KM	CWDM	Dual LC	DFB	PIN	SM
OP3480D-XX	1.25Gb/s	SFP	80KM	CWDM	Dual LC	DFB	PIN	SM
OP340CD-XX	1.25Gb/s	SFP	120KM	CWDM	Dual LC	DFB	APD	SM
OP3440D-DXX	1.25Gb/s	SFP	40KM	DWDM ITU	Dual LC	DFB	PIN	SM
OP3480D-DXX	1.25Gb/s	SFP	80KM	DWDM ITU	Dual LC	DFB	PIN	SM
OP340CD-DXX	1.25Gb/s	SFP	120KM	DWDM ITU	Dual LC	DFB	APD	SM



1.25G SFP SOLUTIONS

Features

- 热插拔SFP封装
 - 符合SFP MSA
 - +3.3V单电源供电
 - 最远传输距离可达120Km
 - 单LC或SC光接口
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
- Hot-pluggable SFP package
 - Compliant with SFP MSA
 - Single +3.3V power supply
 - Maximum link up to 120km
 - Single LC/SC connector
 - Operating temperature range:0~70°C
 - Built-in digital diagnostic functions
 - RoHS compliant

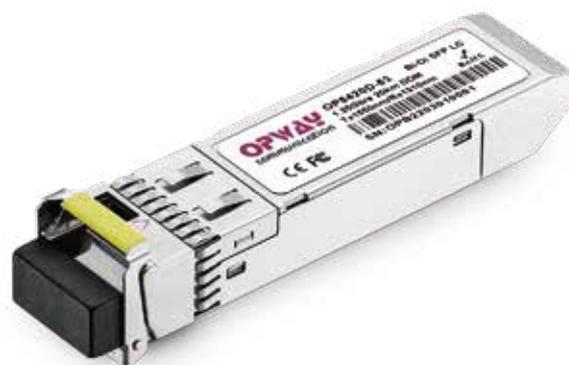

1.25G Bi-Di SFP

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OP5405D-35	1.25Gb/s	SFP	500M	TX1310/RX1550	Single LC	FP	PIN	MM
OP5405D-53	1.25Gb/s	SFP	500M	TX1550/RX1310	Single LC	FP	PIN	MM
OP5403D-35	1.25Gb/s	SFP	3KM	TX1310/RX1550	Single LC	FP	PIN	SM
OP5403D-53	1.25Gb/s	SFP	3KM	TX1550/RX1310	Single LC	FP	PIN	SM
OP5420D-35	1.25Gb/s	SFP	20KM	TX1310/RX1550	Single LC	FP	PIN	SM
OP5420D-53	1.25Gb/s	SFP	20KM	TX1550/RX1310	Single LC	DFB	PIN	SM
OP5420D-34	1.25Gb/s	SFP	20KM	TX1310/RX1490	Single LC	FP	PIN	SM
OP5420D-43	1.25Gb/s	SFP	20KM	TX1490/RX1310	Single LC	DFB	PIN	SM
OP5440D-35	1.25Gb/s	SFP	40KM	TX1310/RX1550	Single LC	DFB	PIN	SM
OP5440D-53	1.25Gb/s	SFP	40KM	TX1550/RX1310	Single LC	DFB	PIN	SM
OP5480D-45	1.25Gb/s	SFP	80KM	TX1490/RX1550	Single LC	DFB	PIN	SM
OP5480D-54	1.25Gb/s	SFP	80KM	TX1550/RX1490	Single LC	DFB	PIN	SM
OP540CD-45	1.25Gb/s	SFP	120KM	TX1490/RX1550	Single LC	DFB	APD	SM
OP540CD-54	1.25Gb/s	SFP	120KM	TX1550/RX1490	Single LC	DFB	APD	SM

1.25G Bi-Di SC SFP

OP4403D-35	1.25Gb/s	SFP	3KM	TX1310/RX1550	Single SC	FP	PIN	SM
OP4403D-53	1.25Gb/s	SFP	3KM	TX1550/RX1310	Single SC	FP	PIN	SM
OP4420D-35	1.25Gb/s	SFP	20KM	TX1310/RX1550	Single SC	FP	PIN	SM
OP4420D-53	1.25Gb/s	SFP	20KM	TX1550/RX1310	Single SC	DFB	PIN	SM

155M SFP SOLUTIONS

应用 Application

快速以太网、城域网/接入网

SONET OC-3/SDH-1

Fast Ethernet、MAN/AN



155M SFP

Features

- 热插拔SFP封装
 - 符合SFP MSA
 - +3.3V单电源供电
 - 工作温度范围:0~+70°C、-40~+85°C
 - 内置数字诊断功能
 - 符合 RoHS 标准
-
- Hot-pluggable SFP package
 - Compliant with SFP MSA
 - Single +3.3V power supply
 - Operating temperature range:0~70°C or -40~+85°C optional
 - Built-in digital diagnostic functions
 - RoHS compliant





155M SFP SOLUTIONS

Part Number	Data Rate	Package	Distance	Wavelength	Connector	Tx	Rx	Cable
OPE202	Fl:155Mb/s MI:1.25Gb/s	SFP	2KM	1310nm	Dual LC	FP	PIN	MM
OPE210	Fl:155Mb/s MI:1.25Gb/s	SFP	10KM	1310nm	Dual LC	FP	PIN	SM
OP3202D-85	155Mb/s	SFP	2KM	850nm	Dual LC	VCSEL	PIN	MM
OP3202D	155Mb/s	SFP	2KM	1310nm	Dual LC	FP	PIN	MM
OP3220D	155Mb/s	SFP	20KM	1310nm	Dual LC	FP	PIN	SM
OP3240D	155Mb/s	SFP	40KM	1310nm	Dual LC	FP	PIN	SM
OP3280D	155Mb/s	SFP	80KM	1550nm	Dual LC	DFB	PIN	SM

155M Bi-Di LC SFP

OP5202D-35	155Mb/s	SFP	2KM	TX1310/RX1550	Single LC	FP	PIN	MM
OP5202D-53	155Mb/s	SFP	2KM	TX1550/RX1310	Single LC	FP	PIN	MM
OP5220D-35	155Mb/s	SFP	20KM	TX1310/RX1550	Single LC	FP	PIN	SM
OP5220D-53	155Mb/s	SFP	20KM	TX1550/RX1310	Single LC	FP	PIN	SM
OP5240D-35	155Mb/s	SFP	40KM	TX1310/RX1550	Single LC	FP	PIN	SM
OP5240D-53	155Mb/s	SFP	40KM	TX1550/RX1310	Single LC	DFB	PIN	SM
OP5280D-45	155Mb/s	SFP	80KM	TX1490/RX1550	Single LC	DFB	PIN	SM
OP5280D-54	155Mb/s	SFP	80KM	TX1550/RX1490	Single LC	DFB	PIN	SM

155M Bi-Di SC SFP

OP4220D-35	155Mb/s	SFP	20KM	TX1310/RX1550	Single SC	FP	PIN	SM
OP4220D-53	155Mb/s	SFP	20KM	TX1550/RX1310	Single SC	FP	PIN	SM

155M CWDM&DWDM SFP

OP3280D-XX	155Mb/s	SFP	80KM	CWDM	Dual LC	DFB	PIN	SM
OP3280D-DXX	155Mb/s	SFP	80KM	DWDM ITU	Dual LC	DFB	PIN	SM

PON SOLUTIONS

应用 Application

FTTB/FTTC/FTTH



Features

- EPON/GPON/10G EPON/XGPON/XGSPON/Combo PON可选
- OLT端热插拔SFP或XFP 封装
- ONU端热插拔SFP封装
- 单纤Bi-Di数据链路
- 单SC光接口
- 符合RoHS 标准

- EPON/GPON/10G EPON/XGPON/XGSPON/Combo PON select
- OLT port hot-pluggable SFP or XFP package
- ONU port hot-pluggable SFP package
- Single fiber Bi-Di data link
- Single SC connector
- RoHS compliant



PON SOLUTIONS


Part Number	Package	Data Rate	Class	Wavelength	Tx	Rx
EPON OLT/ONU Module						
OP44P1-ET	SFP	1.25GbpsT/1.25GbpsR	PX-20+	TX1490/RX1310	DFB	APD
OP44P2-ET	SFP	1.25GbpsT/1.25GbpsR	PX-20++	TX1490/RX1310	DFB	APD
OP44P3-ET	SFP	1.25GbpsT/1.25GbpsR	PX-20+++	TX1490/RX1310	DFB	APD
OP44P1-EU	SFP	1.25GbpsT/1.25GbpsR	PX-20+	TX1310/RX1490	FP	PIN
GPON OLT / ONU Module						
OP46B1-GT	SFP	2.5GbpsT/1.25GbpsR	B+	TX1490/RX1310	DFB	APD
OP46C1-GT	SFP	2.5GbpsT/1.25GbpsR	C+	TX1490/RX1310	DFB	APD
OP46C2-GT	SFP	2.5GbpsT/1.25GbpsR	C++	TX1490/RX1310	DFB	APD
OP44B1-GU	SFP	1.25GbpsT/2.5GbpsR	B+	TX1310/RX1490	DFB	APD
OP44B1-GU-SI	SFP	1.25GbpsT/2.5GbpsR	B+	TX1310/RX1490	DFB	APD
10G EPON OLT / ONU Module						
OP49R1-ET	SFP+	10GbpsT/10GbpsR	PR30	TX1577/RX1270	EML	APD
OP89R1-ET	XFP	10GbpsT/10GbpsR	PR30	TX1577/RX1270	EML	APD
OP49R1-EU	SFP+	10GbpsT/10GbpsR	PR30	TX1270/RX1577	DFB	APD
OP49R2-EU	SFP+	1.25GbpsT/10GbpsR	PRX30	TX1270/RX1577	DFB	APD
XGPON OLT / ONU Module						
OP49N1-GT	SFP+	10GbpsT/2.5GbpsR	N1	TX1577/RX1270	EML	APD
OP49N2-GT	SFP+	10GbpsT/2.5GbpsR	N2a	TX1577/RX1490	EML	APD
OP49N2-GU	SFP+	2.5GbpsT/10GbpsR	N1/N2a	TX1270/RX1577	DFB	APD
XGSPON OLT / ONU Module						
OP49N1-ST	SFP+	10GbpsT/10GbpsR	N1	TX1577/RX1270	EML	APD
OP49N2-ST	SFP+	10GbpsT/10GbpsR	N2	TX1577/RX1490	EML	APD
OP49N2-SU	SFP+	10GbpsT/10GbpsR	N1/N2	TX1270/RX1577	DFB	APD
XGPON Combo						
OP491B-GT	SFP+	XGPON 10GbpsT/2.5GbpsR	N1	TX1577/RX1270	EML	APD
		GPON 2.5GbpsT/1.25GbpsR	B+	TX1490/RX1310	DFB	APD
OP493C-GT	SFP+	XGPON 10GbpsT/2.5GbpsR	N2a	TX1577/RX1270	EML	APD
		GPON 2.5GbpsT/1.25GbpsR	C+	TX1490/RX1310	DFB	APD
XGSPON Combo						
OP491B-ST	SFP+	XGSPON 10GbpsT/10GbpsR	N1	TX1577/RX1270	EML	APD
		GPON 2.5GbpsT/1.25GbpsR	B+	TX1490/RX1310	DFB	APD
OP493C-ST	SFP+	XGSPON 10GbpsT/10GbpsR	N2	TX1577/RX1270	EML	APD
		GPON 2.5GbpsT/1.25GbpsR	C+	TX1490/RX1310	DFB	APD

COPPER SFP SOLUTIONS

应用 Application

交换机/路由器互联

Switch/router to switch/router link

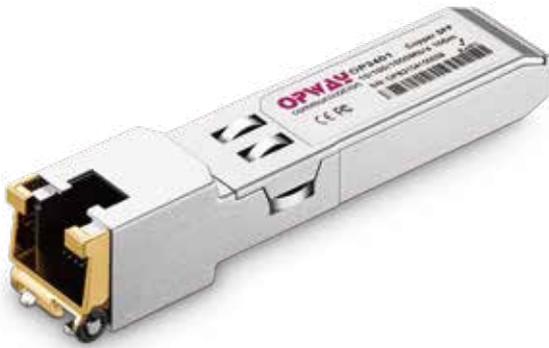

Copper SFP

Features


- 热插拔 SFP 封装
- 符合 SFP MSA
- 紧凑型RJ-45连接器
- 低电磁干扰全金属外壳
- IIC管理接口
- +3.3V单电源供电
- 工作温度范围:0~+70°C、-40~+85°C
- 符合RoHS 标准

- Hot-pluggable SFP package
- Compliant with SFP MSA
- Compact RJ-45 connector assembly
- Fully metallic enclosure for low EMI
- Interface for management and diagnostic monitor
- Single +3.3V power supply
- Operating temperature range:0~70°C or -40~+85°C optional
- RoHS compliant

Part Number	Package	Distance	Data Rate	Connector	Tx_Disable	Rx_LOS
OP3401	SFP	100M	10/100/1000Mb/s	RJ45	YES	YES
OP3401-1	SFP	100M	10/100/1000Mb/s	RJ45	YES	NO
OP3401-2	SFP	100M	10/100/1000Mb/s	RJ45	NO	YES
OP3401-3	SFP	100M	10/100/1000Mb/s	RJ45	NO	NO
OP3401G	SFP	100M	纯1000Mb/s	RJ45	YES	YES
OP3401G-1	SFP	100M	纯1000Mb/s	RJ45	YES	NO
OP3401G-2	SFP	100M	纯1000Mb/s	RJ45	NO	YES
OP3401G-3	SFP	100M	纯1000Mb/s	RJ45	NO	NO
OP3901	SFP+	30M	10Gb/s	RJ45	YES	YES



AOC DAC SOLUTIONS

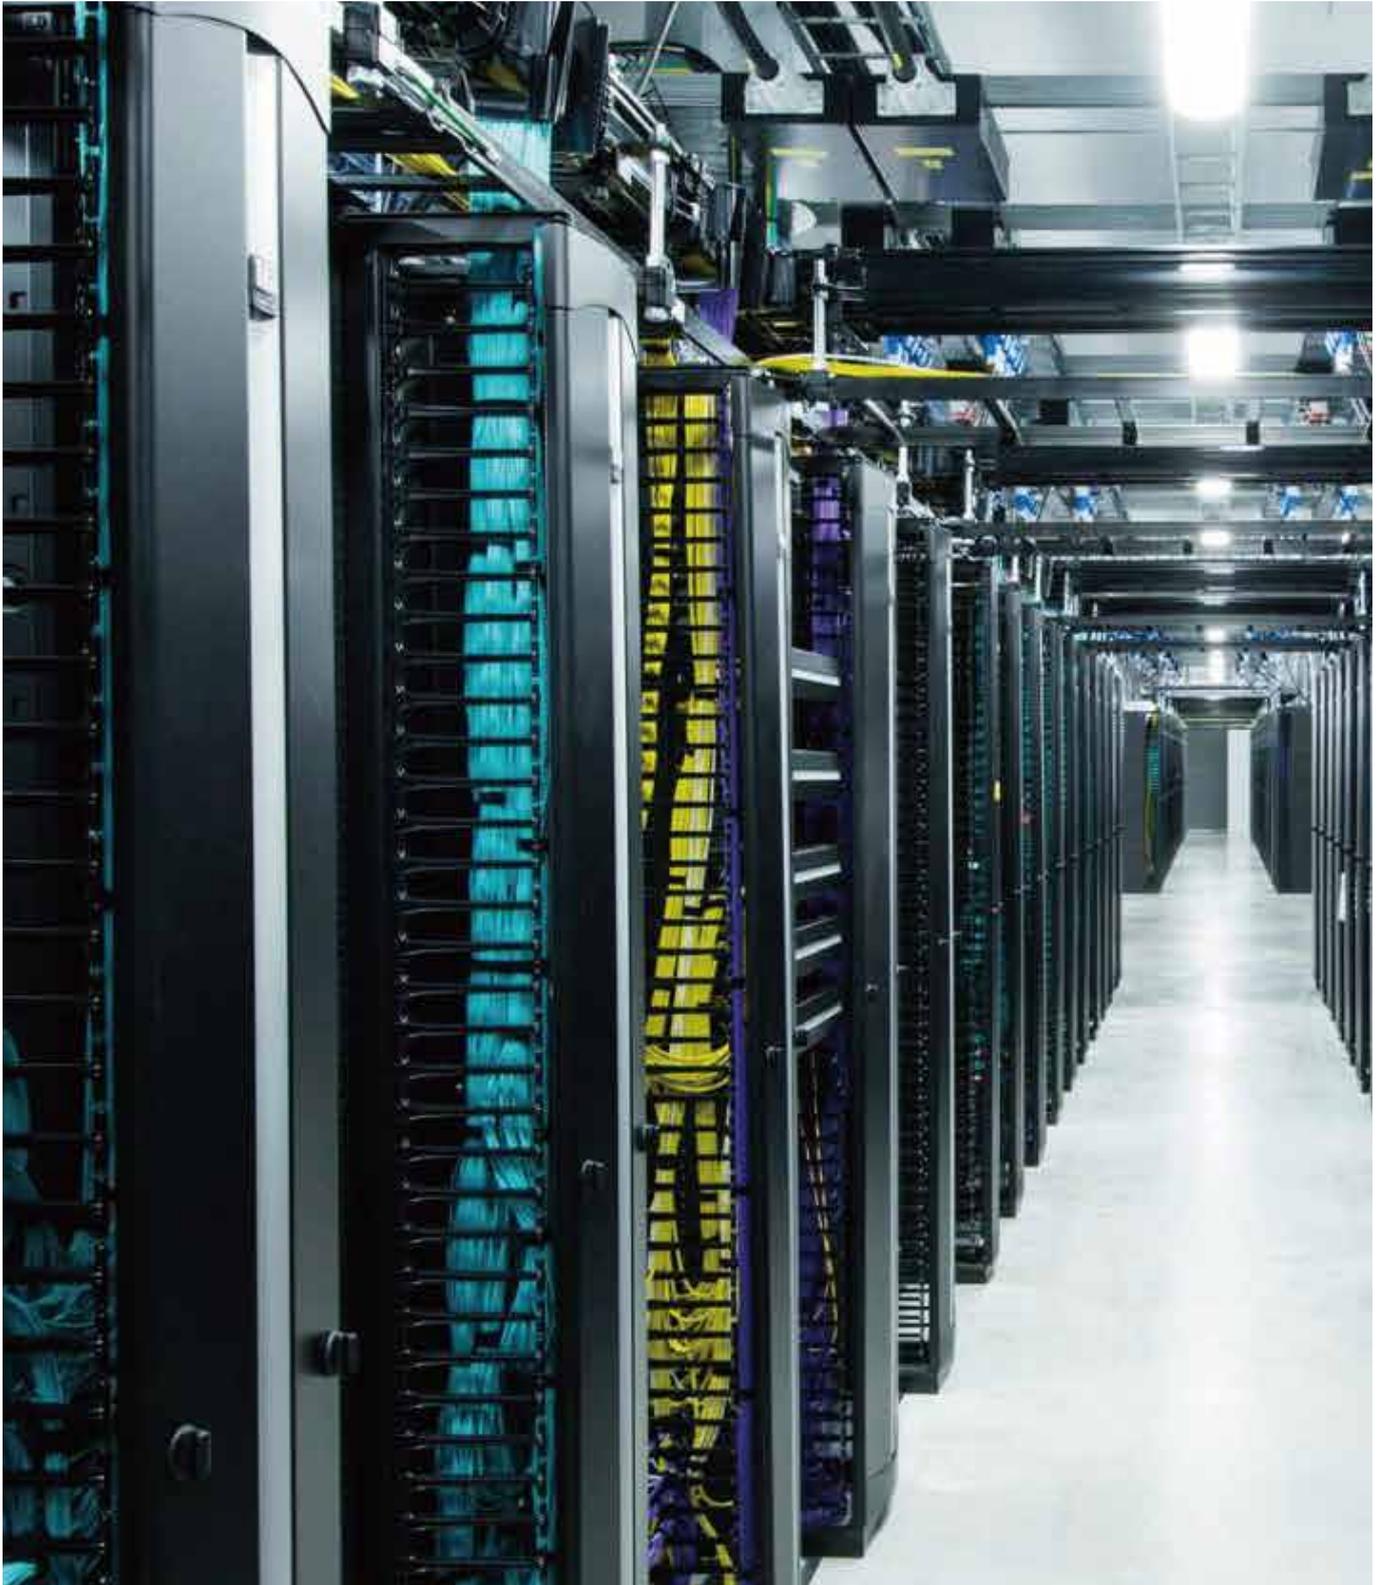


AOC

SOLUTIONS

应用 Application

数据中心
高性能计算机互联
Data center
HPC interconnection

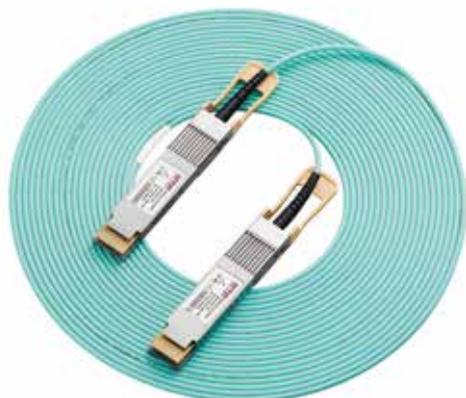

Features

- 全双工有源光缆
 - 热插拔封装
 - 高可靠性850nm VCSEL技术
 - 内置数字诊断功能
 - +3.3V单电源供电
 - 低功耗
 - 工作温度范围:0~70°C
 - 符合RoHS标准
- Full-duplex active optical cable
 - Hot pluggable form factor
 - High reliable 850nm VCSEL technology
 - Built-in digital diagnostic functions
 - Single +3.3V power supply
 - Low power consumption
 - Operating temperature range:0~70°C
 - RoHS 6 compliant

Part Number	Package	Data Rate	Distance	Tx	Rx	Cable
OPDJTx-AOC	QSFP-DD	400Gb/s	0.5~100M	VCSEL	PIN	MM
OPQHTx-AOC	QSFP56	200Gb/s	0.5~100M	VCSEL	PIN	MM
OPQHTx-2-AOC	QSFP56→2*QSFP56	200Gb/s	0.5~100M	VCSEL	PIN	MM
OPQETx-AOC	QSFP28	100Gb/s	0.5~100M	VCSEL	PIN	MM
OPQETx-4-AOC	QSFP28→4*SFP28	100Gb/s	0.5~100M	VCSEL	PIN	MM
OPQCTx-AOC	QSFP+	40Gb/s	0.5~150M	VCSEL	PIN	MM
OPQCTx-4-AOC	QSFP+→4*SFP+	40Gb/s	0.5~150M	VCSEL	PIN	MM
OP30Tx-AOC	SFP28	25Gb/s	0.5~100M	VCSEL	PIN	MM
OP39Tx-AOC	SFP+	10Gb/s	0.5~300M	VCSEL	PIN	MM



应用 Application

数据中心
企业网络
Data center
Enterprise network

DAC SOLUTIONS

Features

- 全双工直连铜缆
 - 热插拔封装
 - +3.3V单电源供电
 - 低串扰
 - 低功耗
 - 工作温度范围:0~70°C
 - 符合RoHS 标准
-
- Full-duplex direct attach cable
 - Hot pluggable form factor
 - Single +3.3V power supply
 - Low crosstalk
 - Low power consumption
 - Operating temperature range: 0~70°C
 - RoHS compliant



Part Number	Package	Data Rate	Distance	Tx	Rx	Cable
OPDJTx	QSFP-DD	400Gb/s	0.5~3M	/	/	Copper
OPDJTx-8	QSFP-DD→8*SFP56	400Gb/s	0.5~3M	/	/	Copper
OPDHTx	QSFP-DD	200Gb/s	0.5~3M	/	/	Copper
OPDHTx-2	QSFP-DD→2*QSFP28	200Gb/s	0.5~3M	/	/	Copper
OPQHTx	QSFP56	200Gb/s	0.5~3M	/	/	Copper
OPQHTx-2	QSFP56→2*QSFP56	200Gb/s	0.5~3M	/	/	Copper
OPQHTx-4	QSFP56→4*SFP56	200Gb/s	0.5~3M	/	/	Copper
OPQETx	QSFP28	100Gb/s	0.5~5M	/	/	Copper
OPQETx-4	QSFP28→4*SFP28	100Gb/s	0.5~5M	/	/	Copper
OPQCTx	QSFP+	40Gb/s	0.5~7M	/	/	Copper
OPQCTx-4	QSFP+→4*SFP+	40Gb/s	0.5~7M	/	/	Copper
OP30Tx	SFP28	25Gb/s	0.5~5M	/	/	Copper
OP39Tx	SFP+	10Gb/s	0.5~7M	/	/	Copper

50GHz ITU Grid DWDM Wavelength

Channel No.	Central Wavelength (nm)	Frequency (THz)	Channel No.	Central Wavelength (nm)	Frequency (THz)
21	1560.61	192.10	41	1544.53	194.10
21.5	1560.20	192.15	41.5	1544.13	194.15
22	1559.79	192.20	42	1543.73	194.20
22.5	1559.39	192.25	42.5	1543.33	194.25
23	1558.98	192.30	43	1542.94	194.30
23.5	1558.58	192.35	43.5	1542.54	194.35
24	1558.17	192.40	44	1542.14	194.40
24.5	1557.77	192.45	44.5	1541.75	194.45
25	1557.36	192.50	45	1541.35	194.50
25.5	1556.96	192.55	45.5	1540.95	194.55
26	1556.55	192.60	46	1540.56	194.60
26.5	1556.15	192.65	46.5	1540.16	194.65
27	1555.75	192.70	47	1539.77	194.70
27.5	1555.34	192.75	47.5	1539.37	194.75
28	1554.94	192.80	48	1538.98	194.80
28.5	1554.54	192.85	48.5	1538.58	194.85
29	1554.13	192.90	49	1538.19	194.90
29.5	1553.73	192.95	49.5	1537.79	194.95
30	1553.33	193.00	50	1537.40	195.00
30.5	1552.93	193.05	50.5	1537.00	195.05
31	1552.52	193.10	51	1536.61	195.10
31.5	1552.12	193.15	51.5	1536.22	195.15
32	1551.72	193.20	52	1535.82	195.20
32.5	1551.32	193.25	52.5	1535.43	195.25
33	1550.92	193.30	53	1535.04	195.30
33.5	1550.52	193.35	53.5	1534.64	195.35
34	1550.12	193.40	54	1534.25	195.40
34.5	1549.72	193.45	54.5	1533.86	195.45
35	1549.32	193.50	55	1533.47	195.50
35.5	1548.91	193.55	55.5	1533.07	195.55
36	1548.51	193.60	56	1532.68	195.60
36.5	1548.11	193.65	56.5	1532.29	195.65
37	1547.72	193.70	57	1531.90	195.70
37.5	1547.32	193.75	57.5	1531.51	195.75
38	1546.92	193.80	58	1531.12	195.80
38.5	1546.52	193.85	58.5	1530.72	195.85
39	1546.12	193.90	59	1530.33	195.90
39.5	1545.72	193.95	59.5	1529.94	195.95
40	1545.32	194.00	60	1529.55	196.00
40.5	1544.92	194.05	60.5	1529.16	196.05



100GHz ITU Grid DWDM Wavelength

Channel No.	Central Wavelength (nm)	Frequency (THz)	Channel No.	Central Wavelength (nm)	Frequency (THz)
17	1563.86	191.7	40	1545.32	194.0
18	1563.05	191.8	41	1544.53	194.1
19	1562.23	191.9	42	1543.73	194.2
20	1561.42	192.0	43	1542.94	194.3
21	1560.61	192.1	44	1542.14	194.4
22	1559.79	192.2	45	1541.35	194.5
23	1558.98	192.3	46	1540.56	194.6
24	1558.17	192.4	47	1539.77	194.7
25	1557.36	192.5	48	1538.98	194.8
26	1556.55	192.6	49	1538.19	194.9
27	1555.75	192.7	50	1537.40	195.0
28	1554.94	192.8	51	1536.61	195.1
29	1554.13	192.9	52	1535.82	195.2
30	1553.33	193.0	53	1535.04	195.3
31	1552.52	193.1	54	1534.25	195.4
32	1551.72	193.2	55	1533.47	195.5
33	1550.92	193.3	56	1532.68	195.6
34	1550.12	193.4	57	1531.90	195.7
35	1549.32	193.5	58	1531.12	195.8
36	1548.51	193.6	59	1530.33	195.9
37	1547.72	193.7	60	1529.55	196.0
38	1546.92	193.8	61	1528.77	196.1
39	1546.12	193.9			

CWDM Bail Color Remarks

Channel No.	Central Wavelength (nm)	Bail Color	Channel No.	Central Wavelength (nm)	Bail Color
27	1270	Light Purple	45	1450	Yellow Orange
29	1290	Sky Blue	47	1470	Gray
31	1310	Yellow Green	49	1490	Violet
33	1330	Yellow Ocher	51	1510	Blue
35	1350	Pink	53	1530	Green
37	1370	Beige	55	1550	Yellow
39	1390	White	57	1570	Orange
41	1410	Silver	59	1590	Red
43	1430	Black	61	1610	Brown

Explore the Way of Optics



WeChat

深圳市光为光通信科技有限公司
SHENZHEN OPWAY COMMUNICATION CO.,LTD.

地址：深圳市南山区西丽百旺信工业园二区5栋3楼
武汉基地：东湖新技术开发区光谷新动力10栋4-6层
电话：0755--86000303
邮箱：info@opwaytech.com
网址：www.opwaytech.com

Address: 3F, Building 5, Section2, Baiwangxin Hi-tech Park, Nanshan, Shenzhen, CN 518055

Wuhan Factory:

4-6F, building 10, Optical Valley New Power, Donghu New Technology Development zone, Wuhan.