



Features:

- ✧ UP to 25.78Gb/s bi-directional data links
- ✧ Hot-Pluggable SFP28 footprint
- ✧ Single LC for Bi-directional Transmission
- ✧ 1271nm DFB laser transmitter for OP5030D-2731, OP5030DI-2731
- ✧ 1331nm DFB laser transmitter for OP5030D-3127, OP5030DI-3127

- ✧ Up to 30km on 9/125um SMF
- ✧ 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface for optical transceivers
- ✧ Power Supply :+3.3V
- ✧ Operating case temperature Range:
Commercial: 0~ 70°C
Industrial:-40~ 85°C
- ✧ RoHS compliant

Applications:

- ✧ 25GE ER Lite
- ✧ eCPRI&CPRI

Part Number Ordering Information

OP5030D-2731	SFP28 30km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver,0~70°C, 25GE
OP5030D-3127	SFP28 30km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, 0~70°C, 25GE
OP5030DI-2731	SFP28 30km BIDI optical transceiver with full real-time digital diagnostic monitoring ,1271nm Transmitter&1331nm Receiver,-40~85°C, 25GE
OP5030DI-3127	SFP28 30km BIDI optical transceiver with full real-time digital diagnostic monitoring , 1331nm Transmitter&1271nm Receiver, -40~85°C, 25GE

Description:

OPWAY's OP5030D-XXXX/OP5030DI-XXXX SFP28 transceivers are designed for use in Ethernet links up to 25.78 Gb/s data rate and up to 30 km link length. They are compliant SFF-8472 , and compatible with SFF-8432 and applicable portions of SFF-8431. The product is RoHS compliant and lead-free per Directive 2011/96/EU.

● Pin Function Definitions

PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Fault	Module transmitter Fault	2
3	Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4

Shenzhen Opway Communication Co., Ltd.

6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	2
7	RS0	Rate select0: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
8	LOS	Receiver Loss of Signal Indication	
9	RS1	Rate select1: module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.	
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter non-inverted data out put	
19	TD-	Transmitter inverted data out put	
20	VeeT	Module transmitter ground	1

Note:

1. The module ground pins shall be isolated from the module case.
2. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.
3. This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
4. This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host_Vcc on the host board.

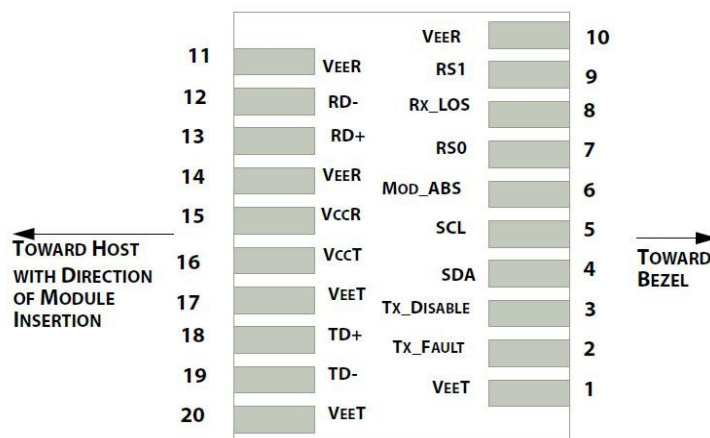


Diagram of Host Board Connector Block Pin Numbers and Names

● Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Storage Temperature	T _S	-40		+85	°C	
Case Operating Temperature	T _c	0		+70	°C	Commercial
Case Operating Temperature	T _c	-40		+85	°C	Industrial
Maximum Supply Voltage	V _{cc}	0		3.6	V	
Relative Humidity(Non-condensing)	RH	0		85	%	

● Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{cc}	3.14		3.46	V	
Supply Current	I _{cc}			450	mA	Industrial
Power Consumption	P			1.5	W	Industrial
Data Rate	R		25.78		Gb/s	
Fiber Length	L			30	KM	
Transmitter Section:						
Input differential impedance	R _{in}		100		Ω	1
Differential input voltage swing	V _{in,pp}	180		450	mV	2
Transmit Disable Voltage	V _D	2		V _{cc}	V	3
Transmit Enable Voltage	V _{EN}	V _{ee}		V _{ee} +0.8	V	
Receiver Section:						
Single Ended Output Voltage Tolerance	V	-0.3		4	V	
Single ended data output swing	V _{out,pp}	180		450	mV	
LOS Fault	V _{LOS fault}	2		V _{ccHO} ST	V	4
LOS Normal	V _{LOS norm}	V _{ee}		V _{ee} +0.8	V	4

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. LOS is an open collector output. Should be pulled up with 4.7k – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

● Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Center Wavelength	λ_t	1260	1271	1280	nm	1271 Tx
		1300	1311	1320	nm	1311 Tx
Spectral width(-20dB)	$\Delta\lambda$			1	nm	
Average Optical Power	P _{avg}	0		+6.0	dBm	
Laser Off Power	P _{off}			-30	dBm	
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	ER	4			dB	
Optical Return Loss Tolerance				-20	dB	
Receiver Section:						
Receiver Center Wavelength	λ_r	1300		1320	nm	1311 Rx
		1260		1280	nm	1271 Rx
Average Receiver Power	Sen	-19		-7	dBm	
Receiver Sensitivity	OMA			-19	dBm	Note 1

Los Assert	LOS _A	-30			dBm	
Los Dessert	LOS _D			-20	dBm	
Los Hysteresis	LOS _H	0.5		5	dB	
Overload	P _{Saturation}	-5			dBm	Note1

Note:

1. Measured with a PRBS 2³¹-1 test pattern, @25.78Gb/s, BER<5E-5.



● Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
TX_Disable Assert Time	t _{off}			100	us
TX_Disable Negate Time	t _{on}			2	ms
Time to Initialize 2-wire interface	t _{2w_start_up}			300	ms
Time to Initialize	t _{start_up}			300	ms
Time to Initialize cooled module and time to power up a cooled module to Power level II	t _{start_up_cooled}			90	s
Time to Power Up to Level II	t _{power_level2}			300	ms
Time to Power Down from Level II	t _{power_down}			300	ms
Tx_Fault assert	Tx_Fault_on			1	ms
Tx_Fault assert for cooled module	Tx_Fault_on_cooled			50	ms
TX_FAULT Reset	t _{reset}	10			us
Rx_LOS assert delay	t _{los_on}			100	us
Rx_LOS negate delay	t _{los_off}			100	us

● Digital Diagnostic Specifications


Parameter	Symbol	Units	Min	Max	Accuracy	Note
Transceiver Temperature	Temp	°C	-40	+85	±5°C	Industrial
			0	+70	±5 °C	Commercial
Transceiver Supply Voltage	Voltage	V	3.15	3.45	±3%	
Transmitter Bias Current	Bias	mA	0	35	±10%	
Transmitter Output Power	Tx-Power	dBm	-5	+2	±3dB	
Receiver Average Optical Input Power	Rx-Power	dBm	-12	-2	±3dB	

● Recommended Circuit:

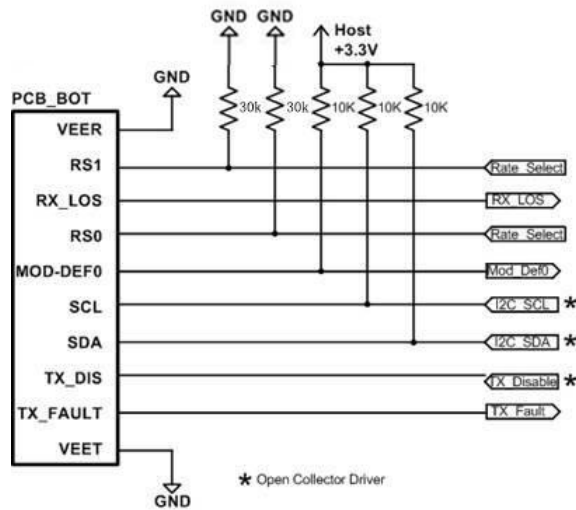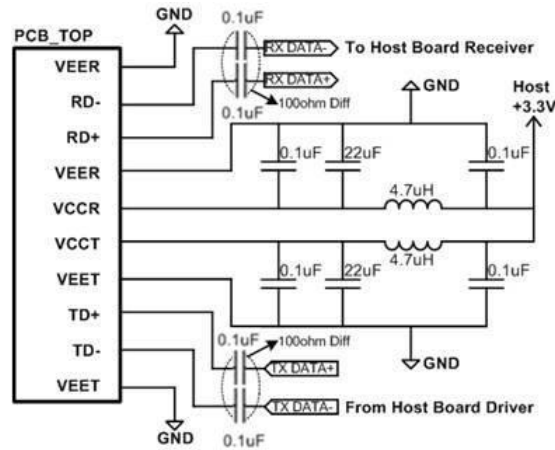

Recommended High-speed Interface Circuit

● **Mechanical Dimensions:**

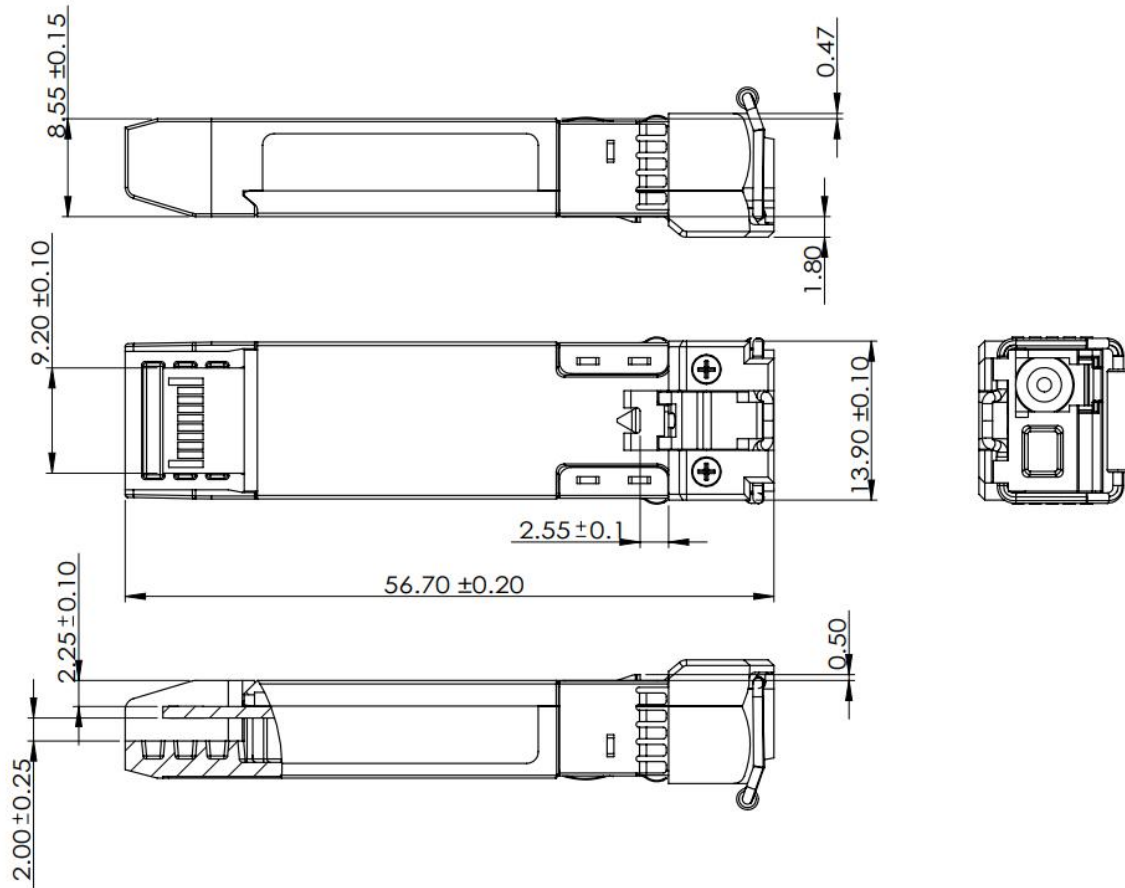

Published by Shenzhen OPWAY Communication Co., Ltd.
Copyright © OPWAY
All Rights Reserved